


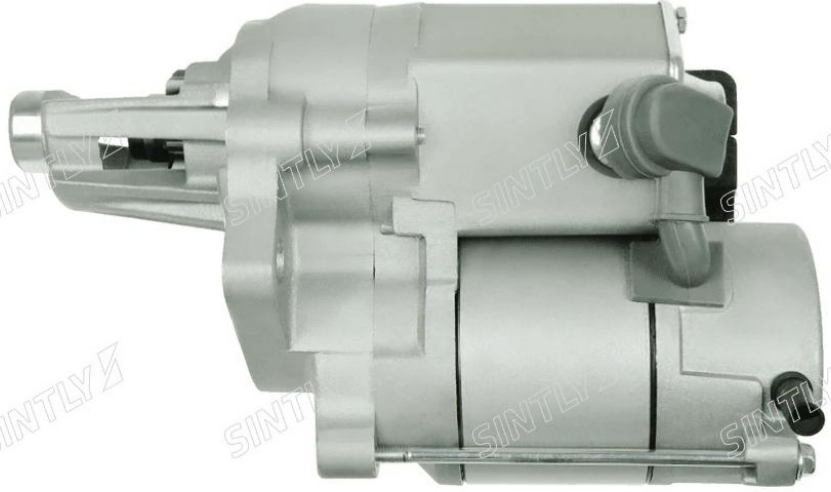

Especificaciones

Especificación	Valor
No./teeth	10 qty
Power	1.4 kW
No./mount. holes [qty.]	2 qty
O.1 [mm]	99 mm
No./mount. holes with thread [qty.]	0 qty
C.1 [mm]	11.50 mm
L.1 [mm]	221 mm
Voltage	12 V
Rotation	CW
C.2 [mm]	15.50 mm
Size A [mm]	71 mm
Size B [mm]	23 mm

Aplicaciones

Marca
CHRYSLER

Código original

128000-4960	128000-5270
17084	2095150

Código equivalente (Fabricante del vehículo)

111764 (CARGO)	113100 (CARGO)
F032111764 (CARGO)	F032113100 (CARGO)
17010 (DELCO)	19011800 (DELCO)
17084N (WAI / TRANSPO)	17084R (WAI / TRANSPO)
17466N (WAI / TRANSPO)	17466R (WAI / TRANSPO)
2-1398ND (WAI / TRANSPO)	1877560 (CHRYSLER)
2095150 (CHRYSLER)	2098500 (CHRYSLER)
2785560 (CHRYSLER)	2875560 (CHRYSLER)
3255250 (CHRYSLER)	3656575 (CHRYSLER)
3656650 (CHRYSLER)	3675560 (CHRYSLER)
3755250 (CHRYSLER)	3755259 (CHRYSLER)
3755900 (CHRYSLER)	4091950 (CHRYSLER)
4091975 (CHRYSLER)	4106113 (CHRYSLER)
4106114 (CHRYSLER)	4111855 (CHRYSLER)
4111860 (CHRYSLER)	4145300 (CHRYSLER)
4145359 (CHRYSLER)	4145360 (CHRYSLER)
4145568 (CHRYSLER)	4349144 (CHRYSLER)
4379143 (CHRYSLER)	4379160 (CHRYSLER)
5226844 (CHRYSLER)	53005984 (CHRYSLER)
20432991BN (REAL)	246-14132 (DIXIE)
S-8215 (DIXIE)	25-2278 (ELSTOCK)
255010 (KUHNER)	6040199 (SANDO)
830.557.102 (PSH)	830.557.102.461 (PSH)
830.558.102 (PSH)	830.558.102.050 (PSH)
830.558.102.460 (PSH)	S135.443 (PSH)
S135.444 (PSH)	91-29-5079 (WILSON)
CST40199 (CASCO)	CST40199AS (CASCO)
CST40199ES (CASCO)	CST40199GS (CASCO)
CST40199OS (CASCO)	CST40199RS (CASCO)
LRS01396 (LUCAS)	LRS1396 (LUCAS)
MAV421990 (SIOM)	MD017649 (MITSUBISHI)
S6150 (AS-PL)	UD12359S (AS-PL)
STR70237 (WOODAUTO)	STRE110 (3EFFE)
STRF427 (3EFFE)	S12DE0750A2 (SIDAT)
336556 (LOGISTIK)	STR6582 (ELECTROLOG)
STR6583 (ELECTROLOG)	STX200375 (STARDAX)
STX201171 (STARDAX)	