




STARTER MOTOR
XTLSTR4510


VOLTAGE
24 V

POWER
5.00 kW

APPLICATIONS
HYUNDAI

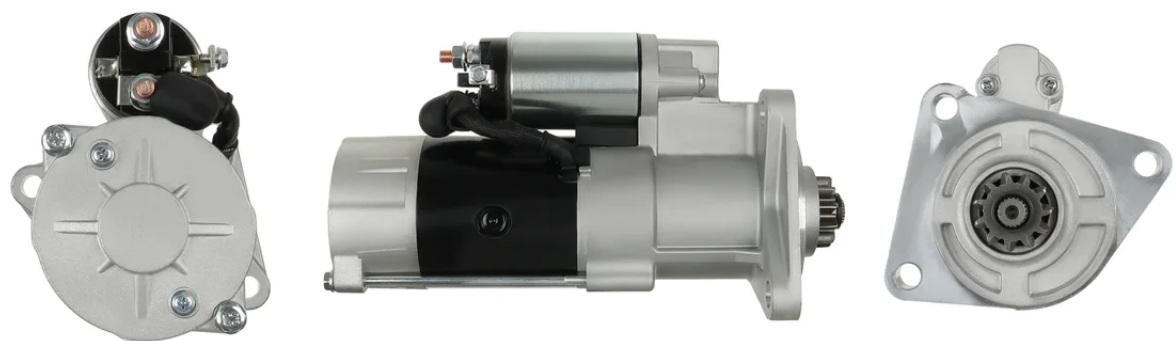

DIMENSIONS

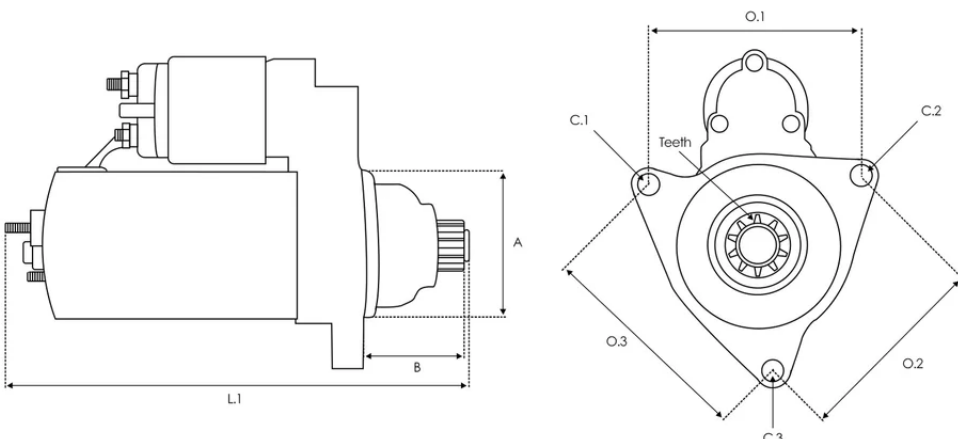

A 100.00 mm B 31.00 mm Teeth 11 qty L.1 287.00 mm O.1 115.00 mm O.2 143.00 mm O.3 94.00 mm C.1 14.00 mm C.2 14.00 mm C.3 14.00 mm

Números OE

HYUNDAI / KIA 3610045C00

Código equivalente

ALANKO 10438361

AS-PL S3156S UD102335S

AUTO MAGNETO AM-1104

AUTOTEAM SMA608

CASCO CST32608GS

DELCO DRS1264

DOOSAN A433767

ELECTROLOG STR00161

KRAUF STA1534

KUHNER 256327V

MANDO 198169 S000V198169

POWERMAX 88215079

REAL 20493806OE

ROBERT'S 130-30147 130-30147NOE

SANDO 6032608.1

VALEO 1198169 608305 S0001198169

WAI 151.528.113.000 151.528.113.360 S143.838
S150.581

WOODAUTO VAL1198169

Aplicaciones

HYUNDAI

- | | | | | | | |
|---------|--------|---------|--------|--------|---------|--------|
| 45D-7E | 50D-7E | 40D-7E | 40D-9S | 60D-7E | 45D-9S | 35D-7E |
| 550D-7E | 80D-7E | 50D-9SA | 50DF-7 | 70DF-7 | 50D-7AE | 35D-9S |
| 60DF-7 | 70D-7E | | | | | |