


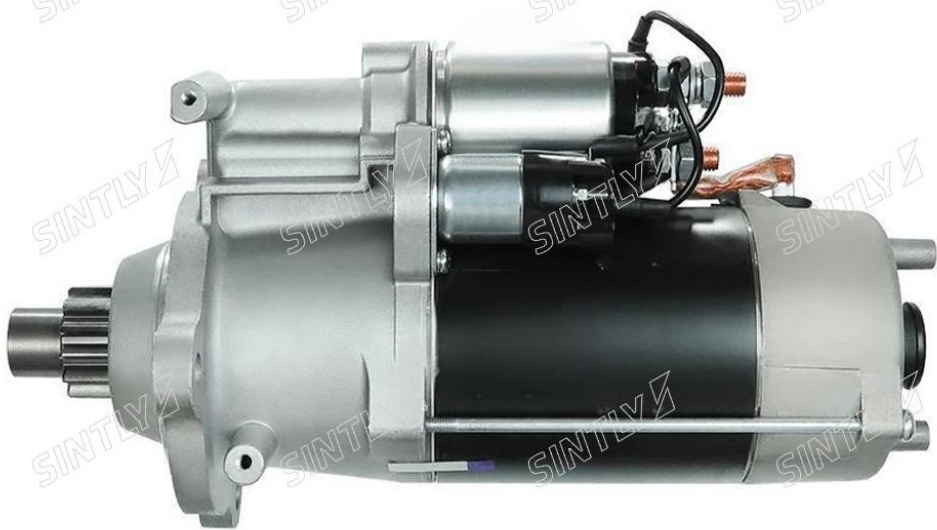

Specifications

| Specification                         | Value    |
|---------------------------------------|----------|
| No./mount. holes [ qty. ]             | 3 qty    |
| O.1 [ mm ]                            | 127 mm   |
| No./mount. holes with thread [ qty. ] | 0 qty    |
| L.1 [ mm ]                            | 365 mm   |
| Rotation                              | CW       |
| Size A [ mm ]                         | 92 mm    |
| Size B [ mm ]                         | 48 mm    |
| No./teeth                             | 12 qty   |
| Power                                 | 6.6 kW   |
| O.3 [ mm ]                            | 127 mm   |
| O.2 [ mm ]                            | 127 mm   |
| C.1 [ mm ]                            | 13.50 mm |
| Voltage                               | 24 V     |
| C.3 [ mm ]                            | 13.50 mm |
| C.2 [ mm ]                            | 13.50 mm |

Applications

| Make | Vehicle |
|------|---------|
| MAN  | TGA (   |

Original Code

|             |            |
|-------------|------------|
| 00010GADVE  | 0001330003 |
| 51262017170 |            |

Equivalent Code (Vehicle Manufacturer)

|                   |                      |
|-------------------|----------------------|
| 51262017170 (MAN) | 51262017172 (MAN)    |
| 551.538.123 (PSH) | S143.732 (PSH)       |
| S145.504 (PSH)    | S0846S (AS-PL)       |
| UD16922S (AS-PL)  | STR50611 (WOODAUTO)  |
| 331916 (LOGISTIK) | CST10847AS (CASCO)   |
| 20401748BN (REAL) | 6010847.0 (SANDO)    |
| MAV128470A (SIOM) | STR1871 (ELECTROLOG) |