


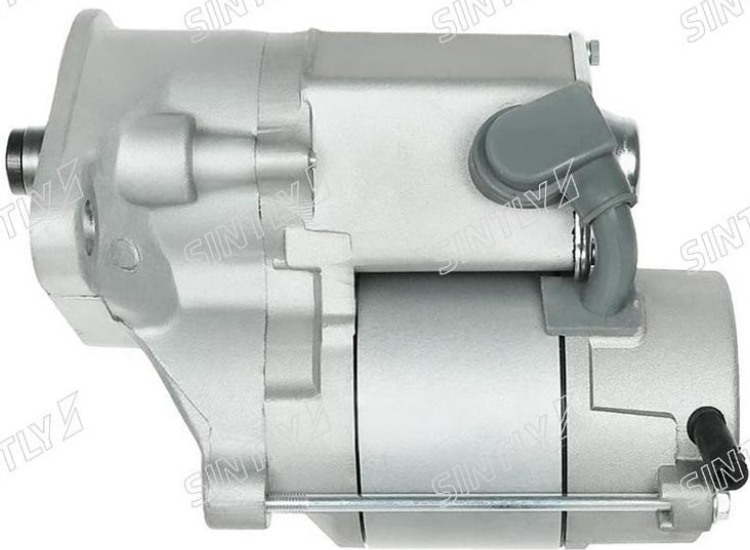

Specifications

Specification	Value
No./teeth	9 qty
Power	1.4 kW
No./mount. holes [qty.]	2 qty
O.1 [mm]	119.5 mm
No./mount. holes with thread [qty.]	1 qty
C.1 [mm]	M10x1.5 mm
L.1 [mm]	189 mm
Voltage	12 V
Rotation	CW
C.2 [mm]	13.00 mm
Size A [mm]	74 mm
Size B [mm]	10 mm

Applications

Make
CHRYSLER

Original Code

17562	228000-3020
228000-3024	4609703

Equivalent Code (Vehicle Manufacturer)

17562N (WAI / TRANSP0)	17562R (WAI / TRANSP0)
190-20311 (ROBERT'S)	25-3008 (ELSTOCK)
4609703 (CHRYSLER)	4686111 (CHRYSLER)
4686111AE (CHRYSLER)	830.596.092 (PSH)
830.596.092.058 (PSH)	830.596.092.945 (PSH)
88213581 (POWERMAX)	91-29-5739 (WILSON)
91-29-5739N (WILSON)	DRZ5183 (DELCO)
DZ6293 (DELCO)	LRS01530 (LUCAS)
LRS1530 (LUCAS)	S-8442 (DIXIE)
STN3115 (KRAUF)	STR8051 (WOODAUTO)
UD16985S (AS-PL)	CST40276AS (CASCO)
20432672BN (REAL)	6040276.0 (SANDO)
MAV422760A (SIOM)	STR6774 (ELECTROLOG)
STM675 (ROLLCO)	STX201116 (STARDAX)