


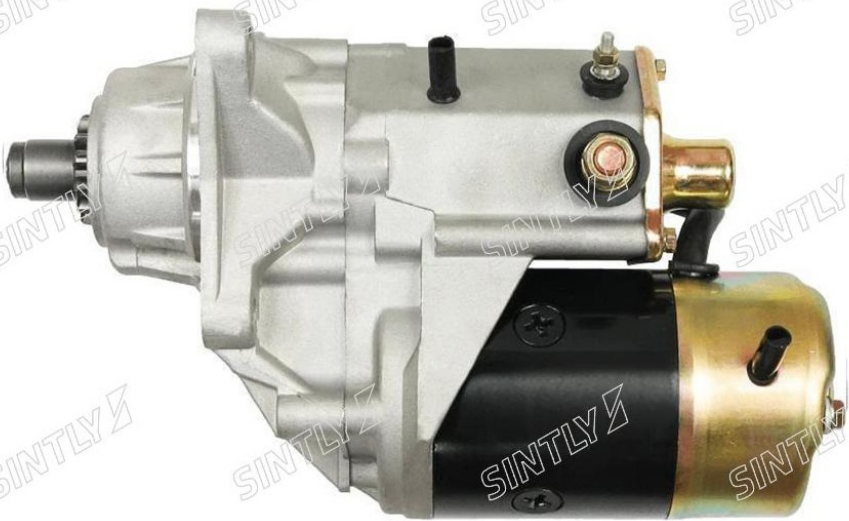

Specifications

Specification	Value
No./mount. holes [qty.]	3 qty
O.1 [mm]	127 mm
No./mount. holes with thread [qty.]	0 qty
L.1 [mm]	295 mm
Rotation	CW
Size A [mm]	89 mm
Size B [mm]	48 mm
No./teeth	13 qty
No./teeth (fits into) [qty.]	13 qty
Power	2.7 kW
O.3 [mm]	89 mm
O.2 [mm]	89 mm
C.1 [mm]	10.50 mm
Voltage	12 V
C.3 [mm]	10.50 mm
C.2 [mm]	10.50 mm

Applications

Make
DODGE

Original Code

17548	228000-2290
228000-2291	3935888

Equivalent Code (Vehicle Manufacturer)

113114 (CARGO)	F032113114 (CARGO)
17548N (WAI / TRANSPO)	20432281BN (REAL)
255129 (KUHNER)	3604684RX (CUMMINS)
3921682 (CUMMINS)	3935888 (CUMMINS)
5016522AA (CUMMINS)	4741012 (CHRYSLER)
4746639 (CHRYSLER)	6040182 (SANDO)
69017 (DELCO)	CGB-22290 (AINDE)
CST40182AS (CASCO)	CST4018A (CASCO)
CST4018AAS (CASCO)	CST4018AES (CASCO)
CST4018AGS (CASCO)	CST4018AOS (CASCO)
CST4018ARS (CASCO)	MAV421820 (SIOM)
UD00713S (AS-PL)	336195 (LOGISTIK)
STR6560 (ELECTROLOG)	