


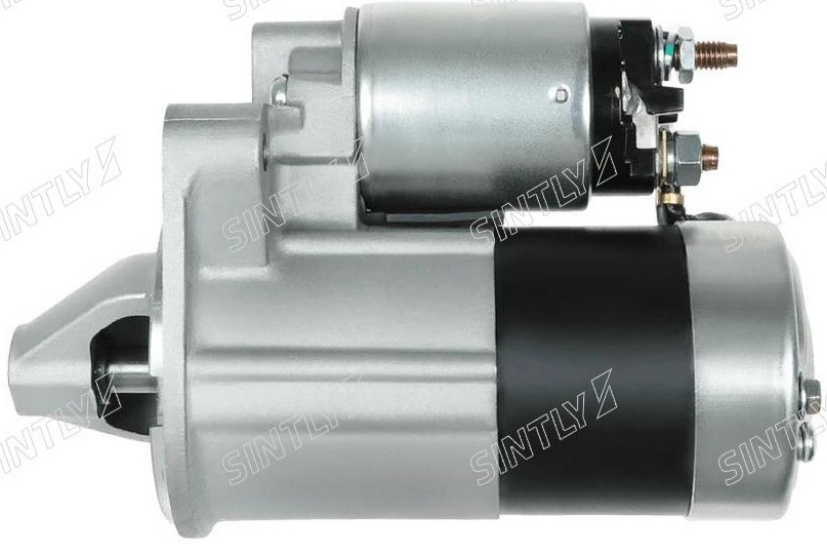

Specifications

Specification	Value
No./mount. holes [qty.]	3 qty
O.1 [mm]	115.5 mm
No./mount. holes with thread [qty.]	2 qty
L.1 [mm]	194.5 mm
Rotation	CW
Size A [mm]	82.5 mm
Size B [mm]	6.5 mm
No./teeth	10 qty
Power	1.2 kW
O.3 [mm]	75 mm
O.2 [mm]	71.5 mm
C.1 [mm]	M10x1.5 mm
Voltage	12 V
C.3 [mm]	10.50 mm
C.2 [mm]	M10x1.5 mm

Applications

Make
CHRYSLER

Original Code

04727314AA	17911
M0T90481	MOT90482ZC

Equivalent Code (Vehicle Manufacturer)

PRSF478 (3EFFE)	STRF478 (3EFFE)
CGB-54104 (AINDE)	S5342S (AS-PL)
UD20395S (AS-PL)	UD21252S (AS-PL)
AEY2432 (AUTOELECTRO)	CST35277GS (CASCO)
3938 (CEVAM)	04727314AA (CHRYSLER)
04727314AB (CHRYSLER)	4727314AA (CHRYSLER)
4727314AB (CHRYSLER)	DRS0492 (DELCO)
DS1602 (DELCO)	12320 (EAI)
25-4104 (ELSTOCK)	STM3008 (KRAUF)
255263 (KUHNER)	255263M (KUHNER)
LRS02432 (LUCAS)	LRS2432 (LUCAS)
830.591.103.130 (PSH)	830.591.103.370 (PSH)
830.591.103.770 (PSH)	S135.736 (PSH)
S143.998 (PSH)	20437772OE (REAL)
6035277.1 (SANDO)	MAV372770 (SIOM)
17911N (WAI / TRANSP0)	91-27-3403 (WILSON)
STR71318 (WOODAUTO)	S12MH0752 (SIDAT)
S12MH0752A2 (SIDAT)	336519 (LOGISTIK)
STR5432 (ELECTROLOG)	STX210333 (STARDAX)
STX210333R (STARDAX)	