


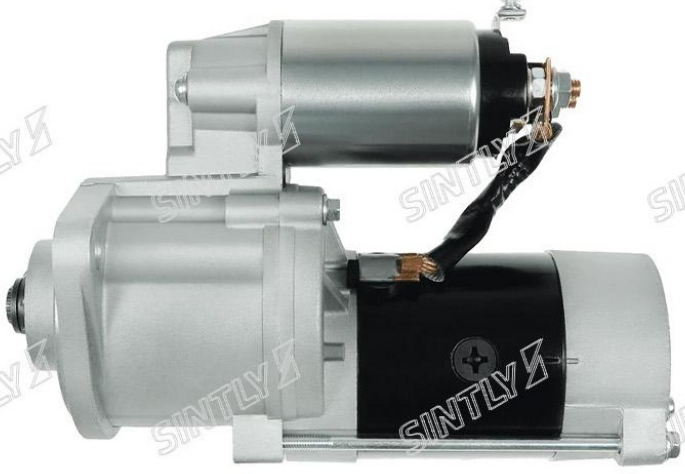

Specifications

Specification	Value
No./mount. holes [qty.]	2 qty
O.1 [mm]	105 mm
No./mount. holes with thread [qty.]	0 qty
L.1 [mm]	250 mm
Rotation	CW
Size A [mm]	82.5 mm
Size B [mm]	22 mm
No./teeth	11 qty
No./teeth (fits into) [qty.]	9. 11 qty
Power	3.2 kW
Oil sealed	Yes
C.1 [mm]	11.50 mm
Voltage	24 V
C.2 [mm]	11.50 mm

Applications

Make
MITSUBISHI
FORD

Original Code

18245	2-2103-MI
34466-03101	5L8T10300MC
6L8T10300MA	6L8Z10346CB
8404	

Equivalent Code (Vehicle Manufacturer)

111913 (CARGO)	F032111913 (CARGO)
18245N (WAI / TRANSP0)	18245R (WAI / TRANSP0)
20437006BN (REAL)	20513017 (PRESTOLITE)
20777 (KUHNER)	20777V (KUHNER)
254367 (KUHNER)	28.0777 (LAUBER)
28.0777M (LAUBER)	33755 (EAI)
34466-03101 (NISSAN)	34466-15101 (NISSAN)
34466-15102 (NISSAN)	34466-20102 (NISSAN)
45-1095 (ELSTOCK)	6035600 (SANDO)
8052515 (FRIESEN)	8213243 (POWERMAX)
8404 (CEVAM)	8EA732662-001 (HELLA)
AEY1842 (AUTOELECTRO)	CGB-23004 (AINDE)
CST35600AS (CASCO)	DRS3284 (DELCO)
JS777 (HC PARTS)	LRS01842 (LUCAS)
LRS1842 (LUCAS)	MAV6100 (SIOM)
S5003 (AS-PL)	STR71158 (WOODAUTO)
STRS138 (3EFFE)	220195 (ERA)
S24MH0032A2 (SIDAT)	ANM15504X (ANDEL)
STR5031 (ELECTROLOG)	3785420 (CLARK)
3785426 (CLARK)	PTC-4073 (POWER TRUCK)
J5215015 (HERTH+BUSS)	