


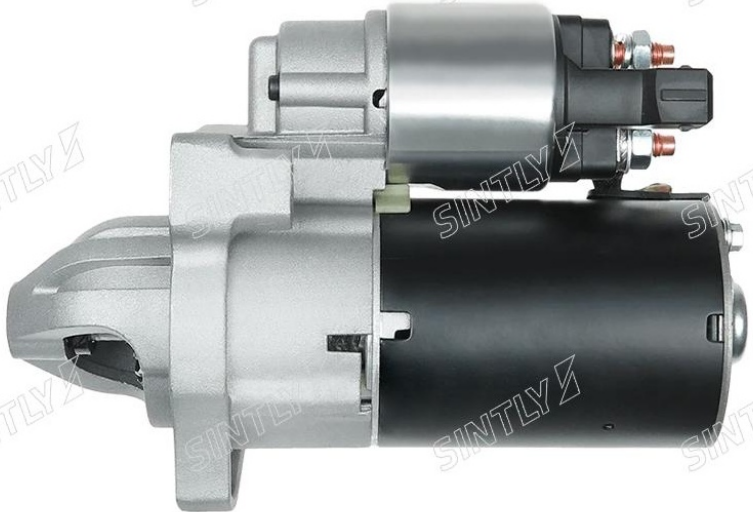

Specifications

Specification	Value
No./mount. holes [qty.]	3 qty
O.1 [mm]	91 mm
No./mount. holes with thread [qty.]	1 qty
L.1 [mm]	208.5 mm
Rotation	CW
Size B [mm]	13.5 mm
No./teeth	15 qty
Power	1.8 kW
O.3 [mm]	74.5 mm
O.2 [mm]	123.5 mm
C.1 [mm]	8.50 mm
Voltage	12 V
C.3 [mm]	M8x1.25 mm
C.2 [mm]	8.50 mm

Applications

Make
npEl

Original Code

31509	3640163
438296	458723

Equivalent Code (Vehicle Manufacturer)

11090367 (EUROTEC)	12329 (EAI)
1614016380 (PEUGEOT)	1628564780 (PEUGEOT)
9674077280 (PEUGEOT)	20479692 (REAL)
220.538.153 (PSH)	S131.587 (PSH)
S144.016 (PSH)	25-5088 (ELSTOCK)
255610V (KUHNER)	31509N (WAI / TRANSPO)
31509N-OE (WAI / TRANSPO)	3280 (CEVAM)
3640163 (OPEL)	95525945 (OPEL)
42438296 (HERTH+BUSS)	6015296 (SANDO)
AEY3925 (AUTOELECTRO)	CST15296 (CASCO)
CST15296AS (CASCO)	CST15296ES (CASCO)
CST15296GS (CASCO)	CST15296OS (CASCO)
CST15296RS (CASCO)	DRS1088 (DELCO)
DS2198 (DELCO)	LRS03925 (LUCAS)
LRS3925 (LUCAS)	STRE457 (3EFFE)
STV9931 (KRAUF)	S3182S (AS-PL)
UD90375S (AS-PL)	VAL438296 (WOODAUTO)
STR00346 (ELECTROLOG)	S12VA0615 (SIDAT)
S12VA0615A2 (SIDAT)	332198 (LOGISTIK)
5015884 (MEAT & DORIA)	STX210275 (STARDAX)
STX210275R (STARDAX)	