


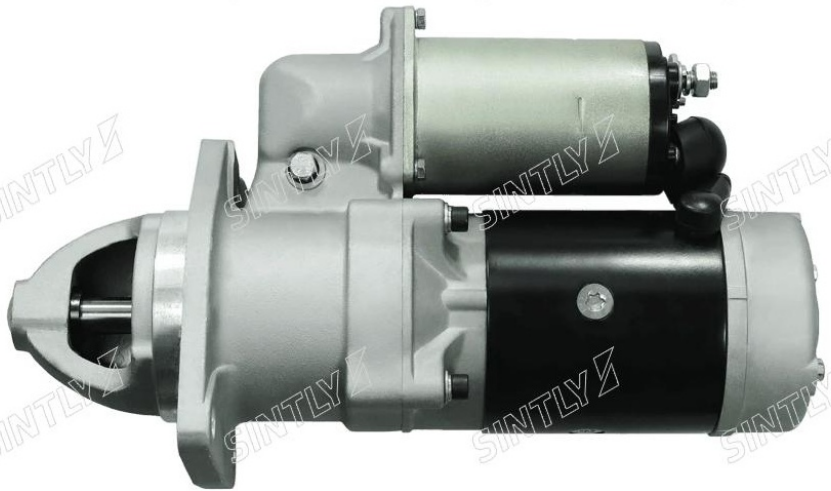

Specifications

| Specification                         | Value    |
|---------------------------------------|----------|
| No./mount. holes [ qty. ]             | 3 qty    |
| O.1 [ mm ]                            | 115 mm   |
| No./mount. holes with thread [ qty. ] | 0 qty    |
| L.1 [ mm ]                            | 406 mm   |
| Rotation                              | CW       |
| Size A [ mm ]                         | 105 mm   |
| Size B [ mm ]                         | 27 mm    |
| No./teeth                             | 12 qty   |
| Power                                 | 7.4 kW   |
| O.3 [ mm ]                            | 168 mm   |
| O.2 [ mm ]                            | 141 mm   |
| C.1 [ mm ]                            | 15.00 mm |
| Voltage                               | 24 V     |
| C.3 [ mm ]                            | 15.00 mm |
| C.2 [ mm ]                            | 15.00 mm |

Applications

| Make  |
|-------|
| ISUZU |

Original Code

|              |              |
|--------------|--------------|
| 0-23000-7060 | 0-23000-7061 |
| 1811002161   |              |

Equivalent Code (Vehicle Manufacturer)

|                                  |                    |
|----------------------------------|--------------------|
| 1811002161 (ISUZU)               | 1811002660 (ISUZU) |
| 1811002750 (ISUZU)               | 1811002751 (ISUZU) |
| 20446936BN (REAL)                | 6050639 (SANDO)    |
| CST50639 (CASCO)                 | CST50639AS (CASCO) |
| CST50639ES (CASCO)               | CST50639GS (CASCO) |
| CST50639OS (CASCO)               | CST50639RS (CASCO) |
| S9251 (AS-PL)                    | UD11096S (AS-PL)   |
| UNIT BOM 185-319 (WAI / TRANSP0) |                    |