



BATTERY RELAY
XTLBR155

RATED VOLTAGE
12 V


PEAK CURRENT
1000 A

TECHNICAL SPECIFICATIONS




TECHNICAL DRAWINGS

MAIN TERMINAL SHAPE

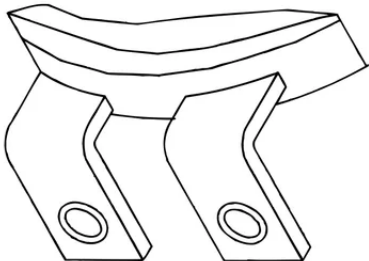

Main terminal shape **A**

TYPE OF CIRCUIT

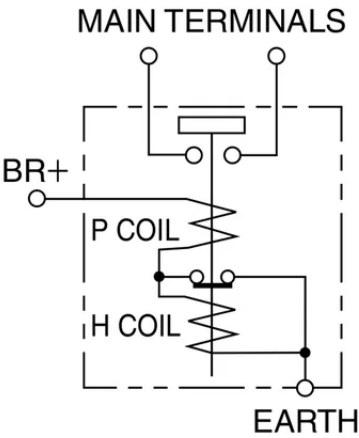

Circuit type **2**

替代编码

Other BR-155

适用车型

KOMATSU

KOMATSU INTERNATIONAL INDUSTRIAL USE