


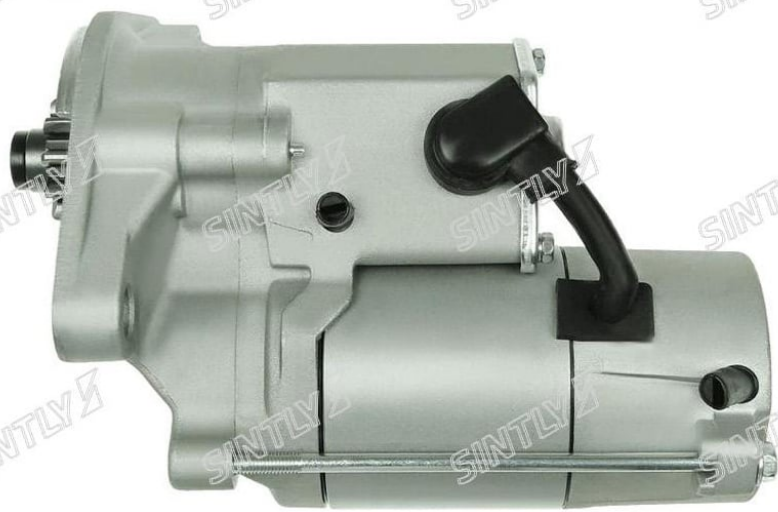

Especificaciones

Especificación	Valor
No./teeth	10 qty
Power	2 kW
No./mount. holes [qty.]	2 qty
O.1 [mm]	135 mm
No./mount. holes with thread [qty.]	1 qty
C.1 [mm]	M12x1.25 mm
L.1 [mm]	222 mm
Voltage	12 V
Rotation	CW
C.2 [mm]	13.00 mm
Size A [mm]	82.5 mm
Size B [mm]	15 mm

Aplicaciones

Marca
TOYOTA

Código original

2-3210-2W	2280002120
28100-05030	33085

Código equivalente (Fabricante del vehículo)

003-T337 (ASHIKA)	0986015331 (BOSCH)
112336 (CARGO)	F032112336 (CARGO)
11800 (EAI)	201089 (KUHNER)
20642 (KUHNER)	20432492BN (REAL)
20500741 (PRESTOLITE)	22.1089 (LAUBER)
25-2267 (ELSTOCK)	28100-05030 (TOYOTA)
28100-54070 (TOYOTA)	28100-54100 (TOYOTA)
28100-54110 (TOYOTA)	28100-54170 (TOYOTA)
28100-54180 (TOYOTA)	28100-54230 (TOYOTA)
28100-54270 (TOYOTA)	28100-54290 (TOYOTA)
28100-54310 (TOYOTA)	28100-54340 (TOYOTA)
28100-54350 (TOYOTA)	28100-54380 (TOYOTA)
28100-54400 (TOYOTA)	28100-54410 (TOYOTA)
28100-54460 (TOYOTA)	33085N (WAI / TRANSP0)
3T337 (JAPKO)	6040294 (SANDO)
8052237 (FRIESEN)	8213299 (POWERMAX)
88213299 (POWERMAX)	9714 (CEVAM)
AES7141 (AUTOELECTRO)	CGB-22120 (AINDE)
CGB-23018 (AINDE)	CST40294AS (CASCO)
DRS3018 (DELCO)	JS1089 (HC PARTS)
LRS00741 (LUCAS)	LRS02085 (LUCAS)
LRS2085 (LUCAS)	LRS741 (LUCAS)
MAV5800 (SIOM)	MTT337 (JAPANPARTS)
RNL1089JS (RNL)	S6044 (AS-PL)
STR5028 (WOODAUTO)	STRS128 (3EFFE)
220005 (ERA)	220524 (ERA)
S12DE0593A2 (SIDAT)	335939 (LOGISTIK)
STR6055 (ELECTROLOG)	STR6055G (ELECTROLOG)
J2810054100 (VW)	STX200185 (STARDAX)
STX200185R (STARDAX)	STX200973 (STARDAX)
STX201361 (STARDAX)	190.915.102.050 (PSH)
S131.363 (PSH)	