


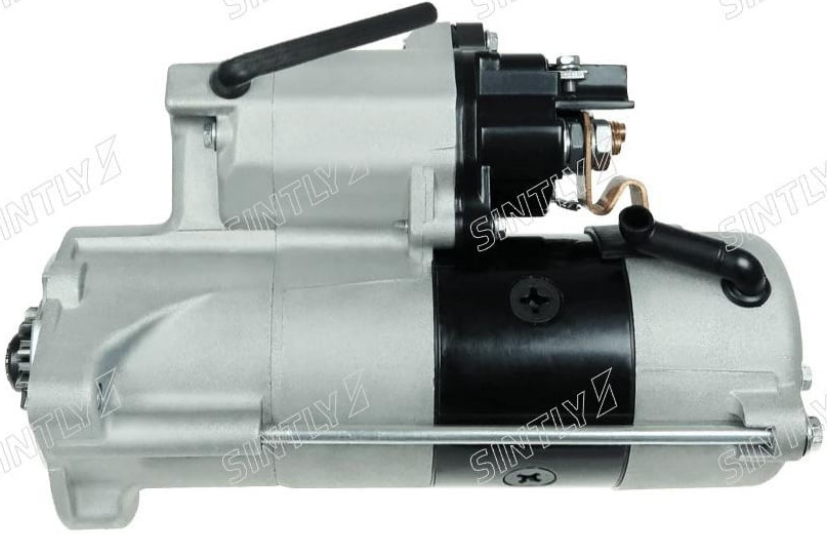

Especificaciones

Especificación	Valor
No./teeth	11 qty
Power	2.7 kW
No./mount. holes [qty.]	2 qty
O.1 [mm]	120 mm
No./mount. holes with thread [qty.]	2 qty
C.1 [mm]	M10x1.5 mm
L.1 [mm]	278 mm
Voltage	12 V
Rotation	CW
C.2 [mm]	M10x1.5 mm
Size A [mm]	80 mm
Size B [mm]	17.5 mm

Aplicaciones

Marca	Vehículo
LAND	ROVER
RANGE	ROVER

Código original

33334	428000-4610
428000-4611	LR010512

Código equivalente (Fabricante del vehículo)

115982 (CARGO)	F032115982 (CARGO)
12186 (EAI)	220828 (ERA)
25-4006 (ELSTOCK)	254331 (KUHNER)
254331D (KUHNER)	254331R (KUHNER)
3135 (CEVAM)	33334N (WAI / TRANSPO)
33334R (WAI / TRANSPO)	7H42-11001-AB (FORD)
7H42-11001-AC (FORD)	CPLA-11001-AC (FORD)
88214518 (POWERMAX)	AEY2334 (AUTOELECTRO)
CST40266AS (CASCO)	CST40266GS (CASCO)
DENDSN1207 (WOODAUTO)	STR70217 (WOODAUTO)
DRS0485 (DELCO)	RAS31596 (DELCO)
LR010512 (ROVER)	LR021461 (ROVER)
LR029152 (ROVER)	LR032541 (ROVER)
NAD500280 (ROVER)	LRS02334 (LUCAS)
LRS2334 (LUCAS)	S6264S (AS-PL)
UD05681S (AS-PL)	UD13192S (AS-PL)
STN1512 (KRAUF)	336097 (LOGISTIK)
450.519.112.050 (PSH)	450.519.112.260 (PSH)
S133.021 (PSH)	S145.759 (PSH)
20432662BN (REAL)	20432662OE (REAL)
6040266.0 (SANDO)	6040266.1 (SANDO)
PRSL668 (3EFFE)	STRL668 (3EFFE)
STR6171 (ELECTROLOG)	STX210288 (STARDAX)
STX210288R (STARDAX)	42009000 (HERTH+BUSS)