


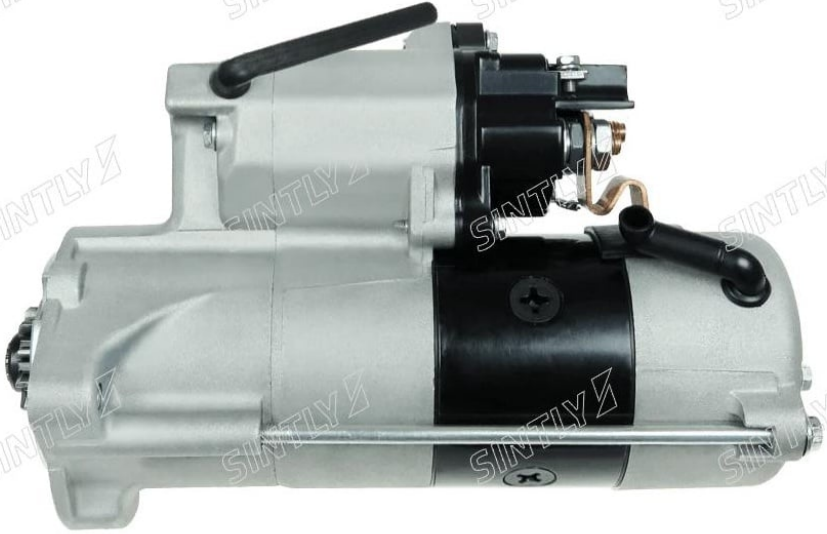

Specifications

Specification	Value
No./teeth	11 qty
Power	2.7 kW
No./mount. holes [qty.]	2 qty
O.1 [mm]	120 mm
No./mount. holes with thread [qty.]	2 qty
C.1 [mm]	M10x1.5 mm
L.1 [mm]	278 mm
Voltage	12 V
Rotation	CW
C.2 [mm]	M10x1.5 mm
Size A [mm]	80 mm
Size B [mm]	17.5 mm

Applications

Make	Vehicle
LAND	ROVER
RANGE	ROVER

Original Code

33334	428000-4610
428000-4611	LR010512

Equivalent Code (Vehicle Manufacturer)

115982 (CARGO)	F032115982 (CARGO)
12186 (EAI)	220828 (ERA)
25-4006 (ELSTOCK)	254331 (KUHNER)
254331D (KUHNER)	254331R (KUHNER)
3135 (CEVAM)	33334N (WAI / TRANSPO)
33334R (WAI / TRANSPO)	7H42-11001-AB (FORD)
7H42-11001-AC (FORD)	CPLA-11001-AC (FORD)
88214518 (POWERMAX)	AEY2334 (AUTOELECTRO)
CST40266AS (CASCO)	CST40266GS (CASCO)
DENDSN1207 (WOODAUTO)	STR70217 (WOODAUTO)
DRS0485 (DELCO)	RAS31596 (DELCO)
LR010512 (ROVER)	LR021461 (ROVER)
LR029152 (ROVER)	LR032541 (ROVER)
NAD500280 (ROVER)	LRS02334 (LUCAS)
LRS2334 (LUCAS)	S6264S (AS-PL)
UD05681S (AS-PL)	UD13192S (AS-PL)
STN1512 (KRAUF)	336097 (LOGISTIK)
450.519.112.050 (PSH)	450.519.112.260 (PSH)
S133.021 (PSH)	S145.759 (PSH)
20432662BN (REAL)	20432662OE (REAL)
6040266.0 (SANDO)	6040266.1 (SANDO)
PRSL668 (3EFFE)	STRL668 (3EFFE)
STR6171 (ELECTROLOG)	STX210288 (STARDAX)
STX210288R (STARDAX)	42009000 (HERTH+BUSS)